



In This Issue:

BERARD
SINCE
1945
The Mega Transport Experts

- > Building Houston | The STS Crane Project
- > On The Road! | Vessel Transport
- > Team Member Spotlight | Hunter Freyou

Building Houston The STS Crane Project





Job Specs


Weight: 1,638 Tons

Dimensions:
458'L x 78'W x 253'H

Equipment Used: 72 axle lines of SPMTs, 4 power packs, 400 x 105 deck barge, 2 tugs, barge ramps, ballast pumps, temporary rails with load spreaders, steel plating and winch trucks

The Beard team has helped several of our nation's ports with new STS crane deliveries and replacements. When the Port of Houston needed three STS cranes transported to another terminal, Berard was commissioned for the job and provided turnkey services including barge, tugs, cargo lashing and marine engineering. The team lifted the cranes from the rail and loaded them out onto a deck barge where they were transported and offloaded at the new location located five miles away. This was done using seventy-two axle lines of SPMTs to move the colossal cranes from point A to point B. The team accomplished this feat in only three days. Our team is the most dedicated you'll find anywhere and their determination got the job done safely and on time. Congrats to everyone involved in making this project a great one!

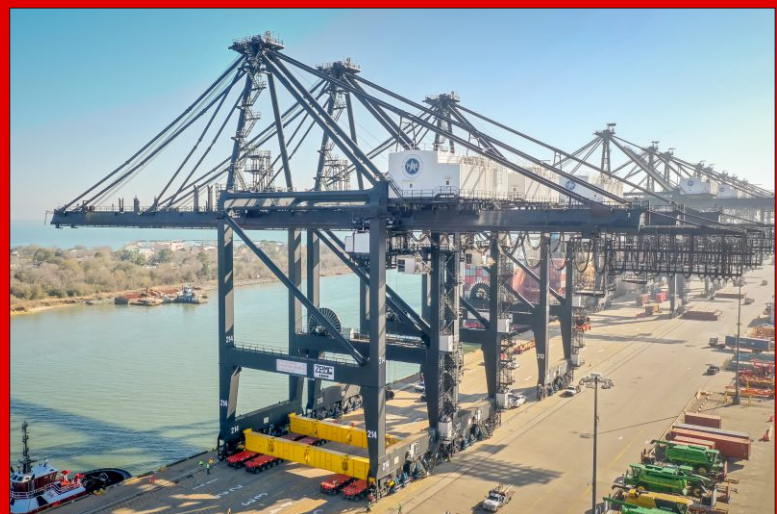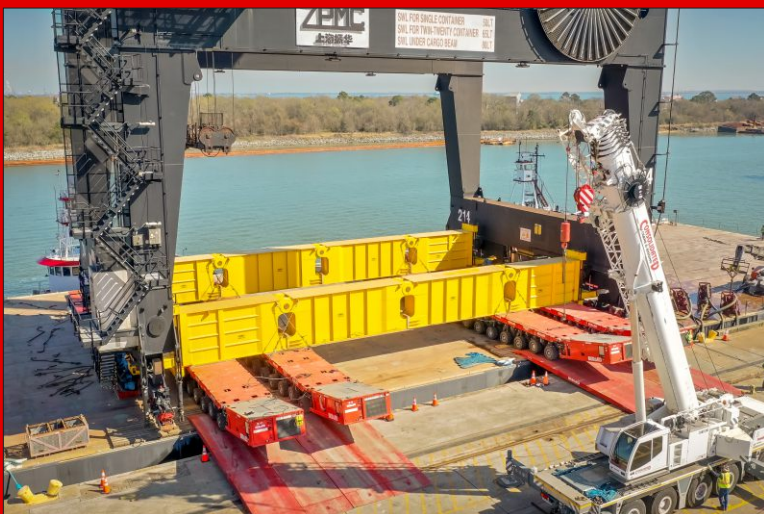

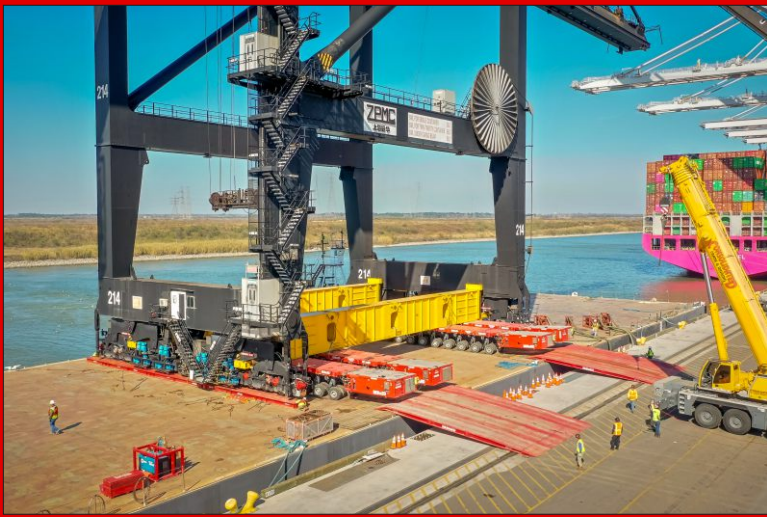



On The Road! Vessel Transport



Job Specs

Weight: 197,000 lbs.

Dimensions:

141'-3"L x 18' W x 15'-2"H

Equipment Used:

9 axle Famonville extendable hydraulic trailer, 6 axle PST-SLE transporter with turntables, prime mover and escort vehicles

Recently the Berard team accepted the challenge of lifting and transporting this 100 ton tower from a fabrication facility to a Baton Rouge area chemical plant. Berard engineers derived a method using a unified jacking system to weigh and lift the tower inside the fabrication shop to Goldhofer PST-SLE transporters with turntables, which moved the tower to the paint area. Once completed, Berard utilized a Faymonville 9 axle HighwayMAX Trailer and a Faymonville ModulMAX 6 axle platform trailer with turntables to transport the 150 foot long vessel on the 50 mile route. After 6 months of planning, permitting, and obstacle mitigation the load was delivered in only 5 hours and self-offloaded onto stands.





> Team Member Spotlight

Hunter Freyou

Shop & Fabrication Helper



Hunter Freyou joined the team in June of 2019 and works as a helper in our main shop as well as in our fabrication department.

“I really like the people I work with, they’re easy going and I learn a lot from them.” says Hunter.

Berard has several Berard family members on the team with Hunter being the great grandson of our founder Roy Berard and the grandson of our President Johnny Berard. In his free time, he enjoys playing baseball on the Loreauville High School team as well as playing video games and hunting.



> Birthdays @ Berard

Happy Birthday!

Happy Birthday to These Dedicated Team Members!

**David Hargraves
Jordan Tyler**